

MODELLING & ANALYSIS OF CNC TURNING PROCESS USING ANSYS SOFTWARE

Mohd Aseerullah¹, Chandra Bhushan²

¹M-Tech, Research Scholar, Department of Mechanical Engineering, BBDU, Lucknow-

226028²Assistant Professor, Department of Mechanical Engineering, BBDU, Lucknow-226028

Abstract: In the current scenario, CNC turning operations perform many critical functions in production industries and Production is a main segment of a product's life cycle. As Aluminum CNC machining methods come second after metal in terms of frequency of execution. This study involves Finite element analysis of the CNC machining process of a cylindrical aluminum alloy AA6082-T6 workpiece. The tool used in this study is Carbide tip tool. The cutting parameters used in CNC machining are Spindle rotational speed, feed rate, and depth of cut. The modeling is done on CATIA V5 and the analysis is carried on in Ansys 19.2. The FEA results are validated based on the analytical calculations.

Keywords: CNC Turning; FEA; Analysis; Catia; Ansys.

1. Introduction

In the manufacturing industry, modelling and analysis play a critical part in assessing service and product quality. We are utilizing AA6082-T6 as a workpiece in this study since aluminum is one of the most machined materials accessible today. Because of their outstanding machinability, aluminum CNC machining techniques placed second only to steel in terms of consistency of implementation. Quality and consumer satisfaction are the two fundamental goals of any equipment or manufacturing business that every company on the planet strives to achieve. Machining is the primary metal processing activity performed on a regular basis in many industrial businesses. Many operating parameters influence the grade of metal cutting obtained, and these input variables influence the output response and functional properties of the end product that is to be produced. A cutting tool is being used in the turning process to process and remove surplus material from the workpiece in order to transform the workpiece into a desired component that may subsequently be employed in a range of activities. Manufacturing a strong end product at a cheap cost is an important component of a product's life cycle, and it may be accomplished by choosing the optimum tool material, cutting settings, machine equipment, and tool geometry. The environment and procedures in manufacturing and services sectors are evolving very quickly, therefore to keep up with the evolution in the contemporary world, the

optimization of metal cutting operations is handled on several levels to adapt to the new needs in the production system.

1.1 CNC Turning Process

Turning is a machining operation wherein a cutting tool, usually a non-rotary tool bit, moves somewhat linearly as the workpiece revolves. The term known as "turning" is designated for the change or the creation of exterior surfaces and can also be used for reducing the diameter by this cutting motion. Turning can be carried out manually, in a classic version of lathe machine that typically requires continual monitoring by the worker or operator, or can also be done automatically, in an automated lathe. The most popular kind of such automation nowadays is computer numerical control, abbreviated as CNC. In addition to turning, CNC is widely utilized in several other forms of machining like drilling, milling etc.



Figure 1: Turning Process

1.2 Software Used

There are two types of software used for the research work in this paper. The first one is a modelling software which is used to model the tool and the workpiece and the other one is a type of analysis software which is used for the analysis part of the research. The modelling software used is Catia V5 and the analysis software is Ansys R19.2. Catia V5 (computer-aided threedimensional interactive application) is a multi-platform software package developed in the year 1998 by the French company Dassault Systèmes, which is now widely utilized in the automotive, aerospace, and other sectors for computer-aided design (CAD), computer-aided manufacturing (CAM), computer-aided engineering (CAE), 3D modelling, and Product

management (PLM). V5 in Catia V5 indicates the fifth version of the software. The second software Ansys that is an analysis software is used to simulate computer models of structures, electronics, or machine components in order to analyze their strength, toughness, elasticity, temperature distribution, electromagnetism, fluid flow, and other characteristics. Ansys is used to assess how a product will perform under diverse conditions without any need for conduct tests or crash testing. The version of the software used in this research paper is Version R19.2.

1.3 CNC Machine Used

The CNC machine used in this research paper is Siemens Sinumerik 828D. The machine is manufactured by the siemens company. The machine SINUMERIK 828D control, with its distinctive CNC capability, establishes production standards for conventional machining on conventional machines, and also functionality to simply manage grinding machines. The SINUMERIK 828D CNC's technology-specific system software allows for a wide range of application areas, including vertical and basic horizontal machining centers ideal for mould making surface and cylindrical grinding machines, and two-channel turning centers with counter spindle, driven tools, and Y axis. Robust hardware design, clever controller design, and quality drive and motor equipment offer the best dynamic responsiveness and accuracy during milling and turning.



Figure 2: Siemens Sinumerik 828D

2. Properties

A workpiece made of AA6082-T6 and a tungsten carbide-tipped tool were employed. Aluminum is among the most processed materials accessible nowadays, hence AA6082-T6 was chosen as a workpiece. Aluminum follows steel in terms of consistency of performance in conventional machining due to its great machinability. Tungsten carbide is used as a tool since it keeps a sharper cutting edge than steel tools and enables for quicker machining.

2.1 Tool Properties

The tool we are employing in this study is a single-point cutting tool made of Tungsten Carbide. Table 1 lists the mechanical qualities of the tool. Some of the parameters in the table are derived from others, such as shear modulus and bulk modulus, which are derived from young's modulus and poisson's ratio, respectively.

Table 1. Mechanical Properties of the Tool

Property	Value (Unit)
Density	20 (kg/m ³)
Young's Modulus	6e ¹¹ (Pa)
Poisson's Ratio	0.2
Bulk Modulus	3.33e ¹¹ (Pa)
Shear Modulus	2.5e ¹¹ (Pa)
Specific Heat	1.84e ⁻⁷ (J/gK)

2.2 Workpiece Properties

This paper's workpiece is a cylindrical AA6082-T6 bar with a length of 150mm. AA6082-T6 is an aluminium alloy with strong corrosion resistance that is mostly used for machining. It has more strength than other alloys and, as a result, is replacing other aluminum alloys in the industry. Table 2 shows the chemical formula for AA6082-T6. The Johnson-Cook failure model is utilized for the failure model, with a linear connection between the shock velocity and the particle velocity. Table 3 lists the mechanical properties of the workpiece.

Table 2. Chemical Composition (wt.%) of AA6082-T6

Aluminium	Silicon	Iron	Copper	Manganese	Magnesium	Chromium	Zinc	Titanium	Others
95.2-98.3	0.7-1.3	0.5	0.1	0.4-0.1	0.6-0.1	0.25	0.2	0.1	0.15

Table 3. Mechanical Properties of the Workpiece

Property	Value (Unit)
Density	
Specific Heat	2710 (kg/m ³)
Shear Modulus	0.9(J/gK)
Melting Temperature	2.69e ¹⁰ (Pa)
Reference Strain Rate	555(°C)
Shock EOS Linear	1(/s)
Gruneisen Coefficient	2.1
Parameter C1	5380(m/s)
Parameter S1	1.337
Johnson Cook Failure	
D1	0.0164
D2	2.245
D3	-2.798
D4	0.007
D5	3.65

3. Modelling

A 3D model of the workpiece and the tool is first modeled in Catia V5 part design module under mechanical design. Both the model i.e., the workpiece and the tool is to be modelled in the same file but both have to be containing a different body so that the analysis can be carried out smoothly. If both the tool and the workpiece is made in the same body then, the analysis software will treat both the components as one whole body and then the penetration of the workpiece is

impossible. The workpiece is made on the y-z plane whereas the tool is made on a user-specified plane.

The workpiece has a diameter of 25.5 mm with a length of 150mm. The tool is then made by using a different body in the same file. The tool is modelled by taking into account the back rake angle and side rake angle which is 0 and 5 respectively in this case. The part program for the model can also be created by selecting the machining processes in lathe machining under machining for the practical work of the same model. A simulation can also be made for the CNC work done on the workpiece. For the model to be imported we saved the file as a .stp extension or we can also save it as .iso file so that the model can easily be identified and processed in the Ansys module. The Tool and the workpiece which is modelled in Catia V5 is shown in Fig. 3.

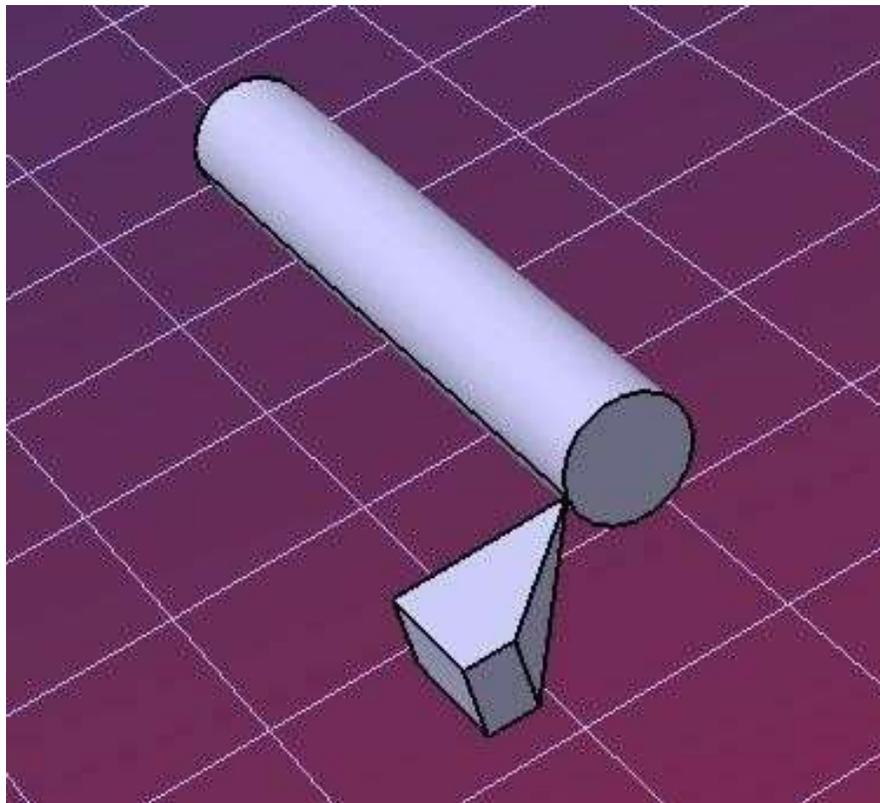


Figure 3: The Tool and the Workpiece modelled in Catia V5

4. Results

There are three types of results obtained in this study. The first one is FEA result which is obtained in Ansys R19.2 software and the second one is the Experimental result which is obtained by a dynamometer and the third one is the Analytical result which is obtained by mathematical functions which is related to the cutting problems and values obtained in the

experimental results. All the results are shown in the next section with the pictures and the graph representation of the values.

4.1 FEA Results

After the analysis of the CNC turning operation of AA6082-T6 with the tool as Tungsten Carbide is completed, we got the result for Normal Stress, Shear Stress, and Shear Elastic Strain. The result shows us the final stage of the process of the CNC turning process with the desired results to be calculated in the explicit dynamics of the Ansys.

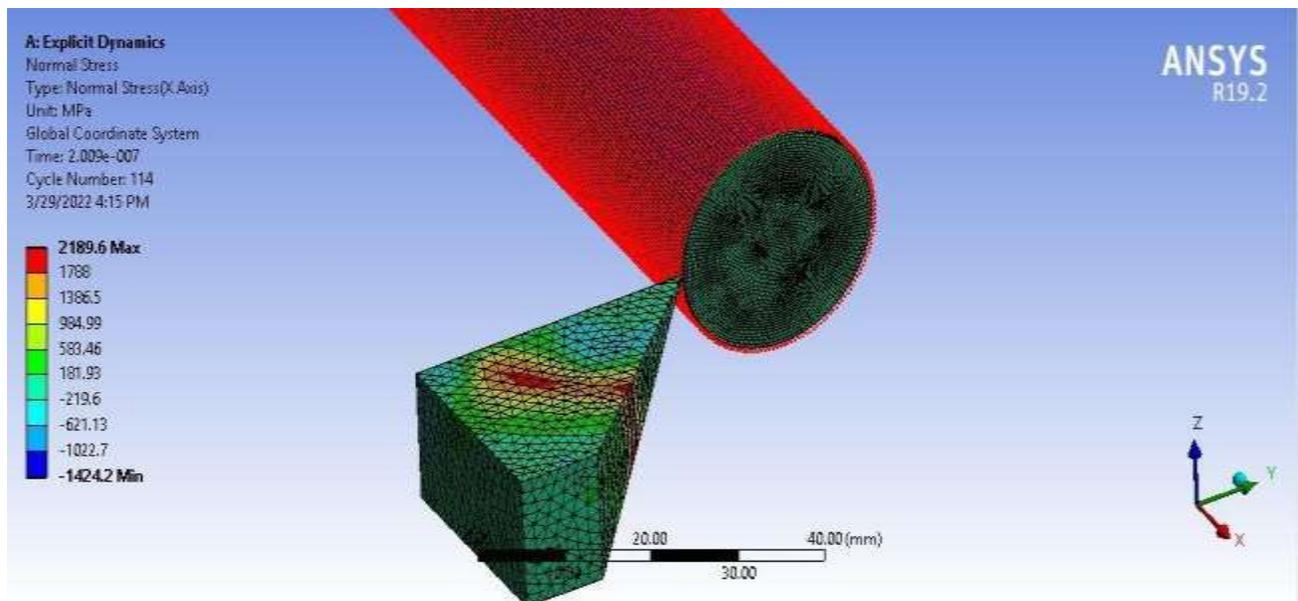


Figure 4: Normal Stress Analysis

In figure 4 the analysis results of normal stress are shown. The Maximum Normal Stress in the system is 2189.6 and the minimum Normal stress is -1424.2. The red part on the workpiece shows the part which will break and flow away from it as a chip. The graph between the Normal stress and the time is plotted and shown in figure 5. The graph is plotted by using 100 Normal stress points. The graph shows the trendline for the Normal stress concerning time.

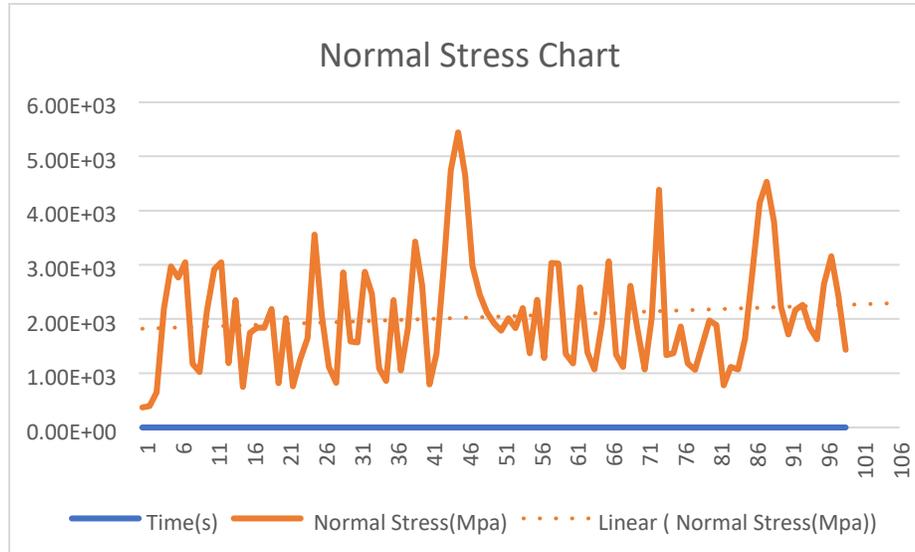


Figure 5: Line Graph (Time vs Normal Stress)

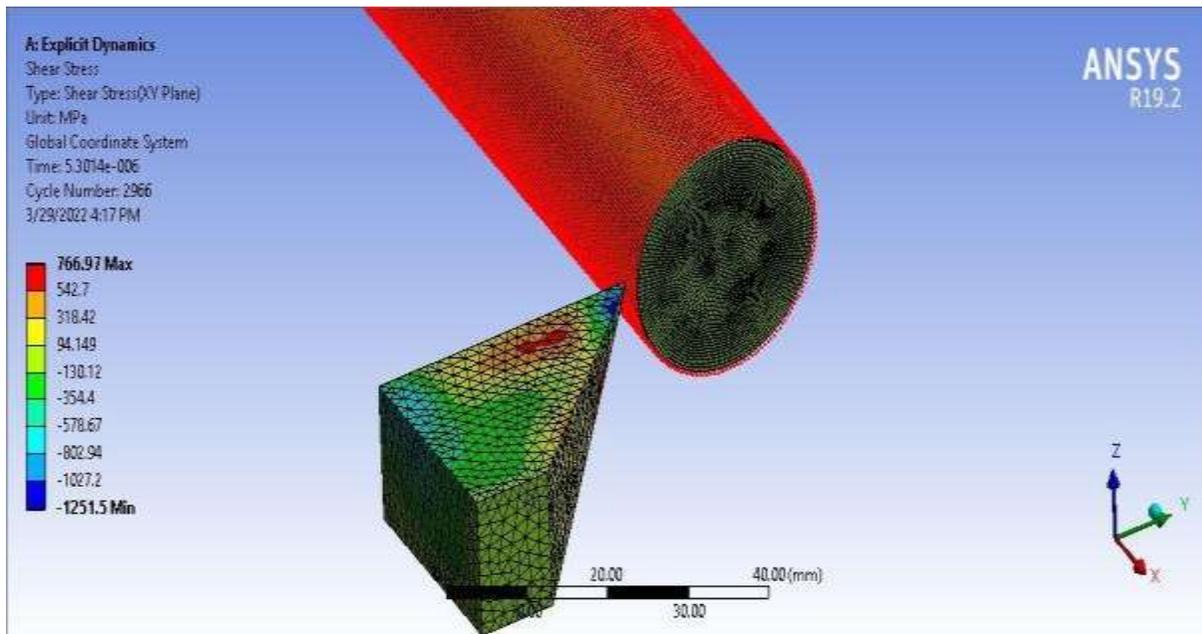


Figure 6: Shear Stress Analysis

In figure 5 the analysis results of shear stress are shown. The Maximum Shear Stress in the system is 766.97 and the Minimum Shear Stress is -1251.5. The red part on the workpiece shows the part which will break and flow away from it as a chip. The graph between the Shear Stress

and the time is plotted and shown in figure 7. The graph is plotted by using 100 Shear Stress points. The graph shows the trendline for the Shear Stress concerning time.

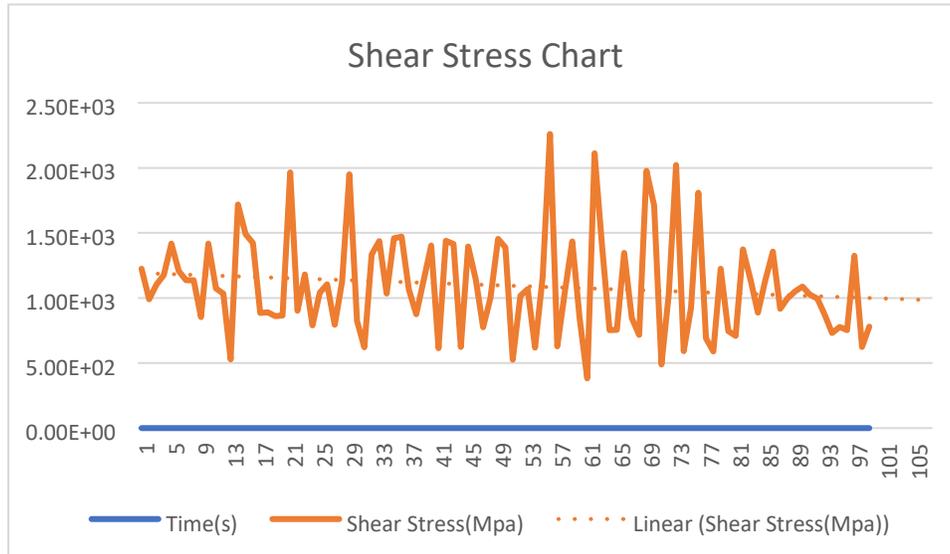


Figure 7: Line Graph (Time vs Shear Stress)

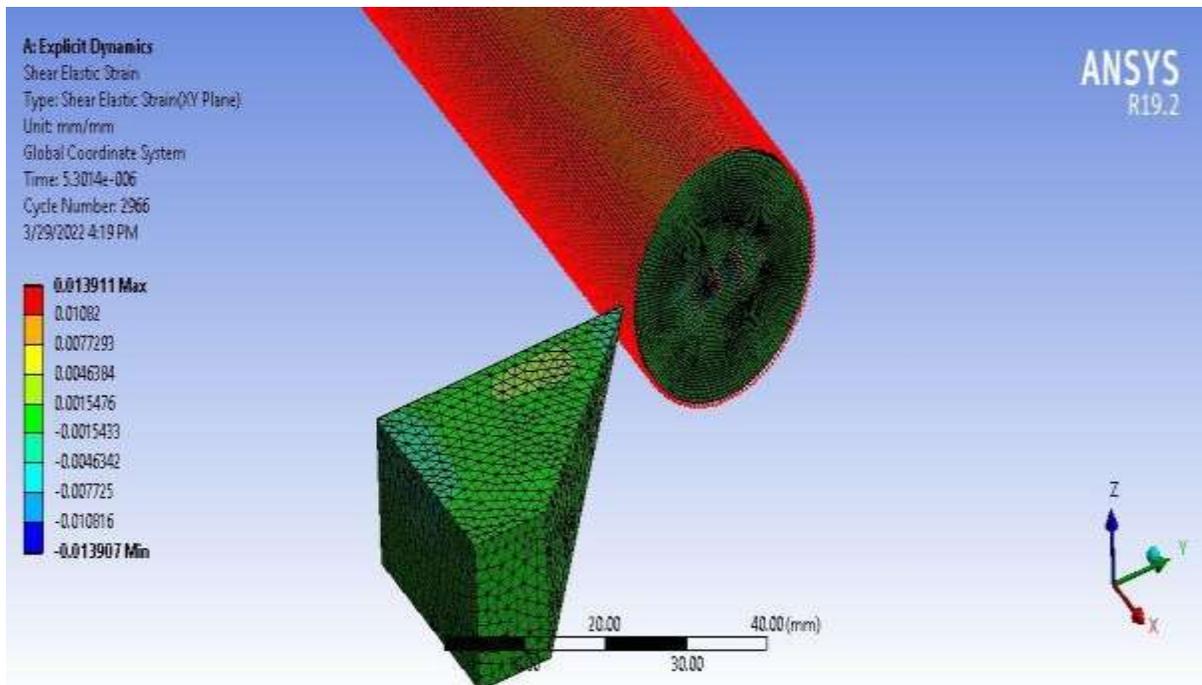


Figure 8: Shear Elastic Strain Analysis

In figure 8 the analysis results of shear Elastic Strain are shown. The Maximum Shear Elastic strain in the system is 0.013911 and the minimum elastic strain is -0.013907. The red part on the workpiece shows the part which will break and flow away from it as a chip. The graph between the Shear Stress and the time is plotted and shown in figure 9. The graph is plotted by using 100 Shear Stress points. The graph shows the trendline for the Shear Elastic Strain concerning time.

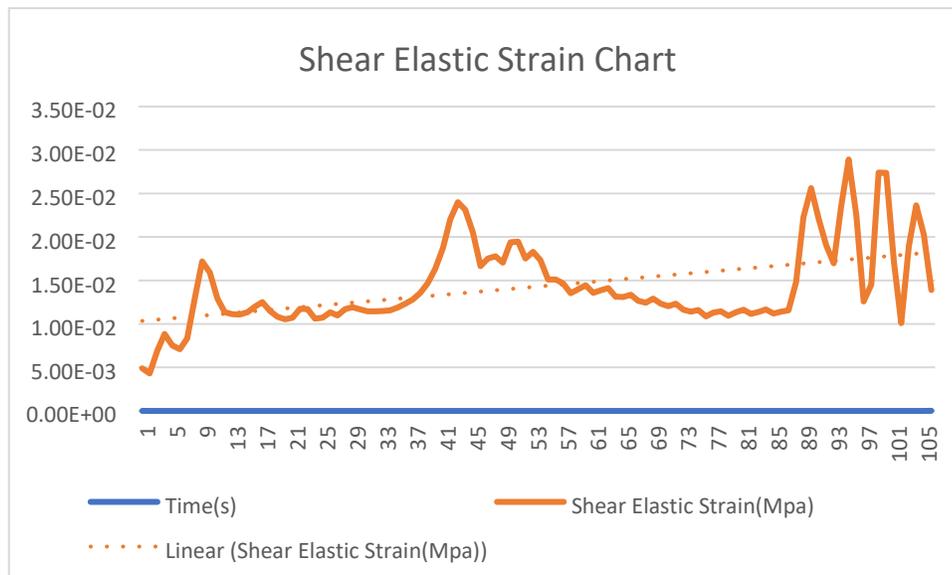


Figure 9: Line Graph (Time vs Shear Elastic Strain)

4.2 Experimental Results

The Experiment is carried out on a Siemens Sinumerik 828D CNC machine and the forces are calculated with the help of the Kistler dynamometer. The diameter of the workpiece was 25.5 mm and the length of the workpiece was 150 mm. After the Turning process is carried out the diameter of the workpiece was minimized to 20mm. The cutting parameters used in CNC machining are Spindle rotational speed, feed rate, and depth of cut. In this experiment, the spindle speed taken chosen is 200 rev/min, Feed 0.1 mm/rev, and the depth of cut is 0.2 mm. The total time taken by the CNC machine to finish the turning process is 5:17 minutes.



Figure 10: Turning Process



Figure 11: Chip formed in turning process

Figure 10 shows the turning process carried out in the Siemens Sinumerik CNC machine and the setup of the dynamometer is also done so that the components of the force can be measured for further results. Figure 11 shows the chip formed in the process of cutting AA6082-T6 and it can easily be seen that the type of chip formed is a continuous chip. For the further calculation of normal stress, shear stress, and shear strain the chip thickness and the chip width is measured by a digital vernier caliper. The dimensions of the chip are as follows: chip thickness of 0.2 mm and chip width of 0.75 mm.

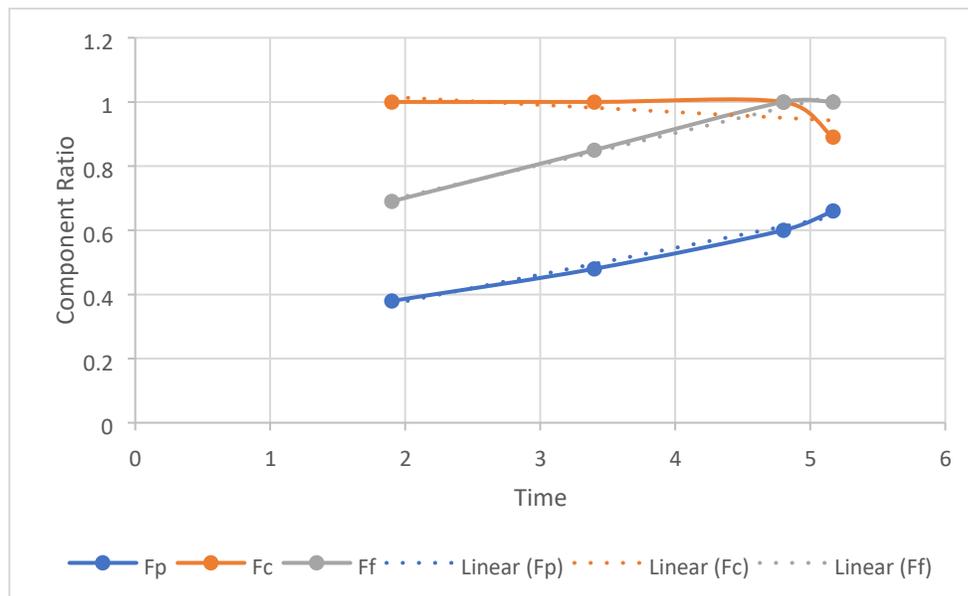


Figure 12: Component ratio vs Time Graph of Results

The component ratio vs Time graph is shown in Figure 12 which shows the results graph of the result taken from the dynamometer. In the graph, F_p is the radial component of the cutting force, F_c is the Cutting component of the cutting force, and F_f is the feed component of the cutting force. Linear F_p , Linear F_c and Linear F_f show the linearity in the cutting component of the system.

4.3 Analytical Results

With the help of the experimental results, we can find the Normal Stress, Shear Stress, and Shear Strain. For that, we first find the cutting ratio which is the ratio of uncut chip thickness to cut chip thickness.

$$\text{Cutting Ratio, } r = \frac{t}{tc} = 0.909$$

$$\text{Shear Angle, } \phi = \tan^{-1} \left[\frac{rcos\alpha}{1-rsin\alpha} \right] = 44.51^\circ$$

$$\text{Normal Stress, } \sigma = \left[\frac{Fcsin\phi + Ftcos\phi}{bt} \right] Sin\phi = 716.14 \text{ MPa}$$

$$\text{Shear Stress, } \tau_s = \left[\frac{Fccos\phi - Ftsin\phi}{bt} \right] Sin\phi = 803.81 \text{ MPa}$$

$$\text{Shear Strain, } \gamma = cot\phi + tan(\phi - \alpha) = 0.0184.$$

5. Conclusion

Three parameters are calculated in this paper those are Normal Stress, Shear Stress, and Shear Strain. In the analysis done in Ansys R19.2 the value of Normal Stress is 2189.6 MPa whereas the calculated value is 716.14 MPa. For Shear Stress, the Ansys calculated value is 766.97MPa whereas the calculated value is 803.81 MPa. For Shear Elastic Strain, the Ansys calculated value is 0.013911 whereas the calculated value is 0.0184.

In Normal Stress, the Percentage error is calculated as 67.3 %.

In Shear Stress, the Percentage error is calculated as 4.80 %.

In Shear Strain, the Percentage error is calculated as 32.27 %.

The Percentage error is maximum in Normal Stress and minimum in Shear Stress which concludes that in this analysis shear stress is the most common factor that is affecting the turning process or the cutting of the workpiece. Percentage error shows that the normal stress value is very far from the expected value.

6. References

- [1] Dr. Vijay Kumar M, Kiran Kumar B.J, RudreshaN, "Optimization of Machining Parameters in CNC Turning of Stainless Steel(EN19) by TAGUCHI'S Orthogonal Array Experiments", ICMMM-2017, Materials Today: Proceedings 5 (2018) 11395–11407.
- [2] R.K.Bharilya, RiteshMalgaya, Lakhan Patidar, R.k. Gurjar, Dr.A.K.Jha, "Study of Optimised process parameters in turning operation through Force Dynamometer on CNC Machine", Materials Today: Proceedings 2(2015)2300-2305.
- [3] Magdum Vikas B. "Evolution and Optimization Parameter for Turning-En8 steel", International Journal Engineering Trends and Technology Volume 4 Issue 5 May 2013 pp 15641568.
- [4] Mayur Verma, Sharad K. Pradhan, "Experimental and Numerical investigations in CNC turning for different combinations of tool inserts and workpiece material", Materials Today: Proceedings, <https://doi.org/10.1016/j.matpr.2019.12.193>.
- [5] S.P. Palaniappan, K. Muthukumar, R.V. Sabariraj, S.Dinesh Kumar, T.Sathish, "CNC turning process parameters optimization on Aluminium 6082 alloy by using Taguchi and ANOVA", Materials Today: Proceedings, <https://doi.org/10.1016/j.matpr.2019.10.053>. [6] N. Satheesh Kumar, Ajay Shetty, Ashay Shetty, Ananth K, Harsha Shetty, "Effect of Spindle Speed and feed rate on surface roughness of Carbon Steels in CNC turning", Procedia Engineering 38 (2012) 691-697.
- [7] A. Saravankumar, S.C. Karthikeyan, B. Dhamoetharan, V. Gokul kumar, "Optimization of CNC Turning Parameters on Aluminum Alloy 6063 using Taguchi Robust Design" materials today: Proceedings volume 5, issue 2 part 2, 2018, pages 8290-8298.
- [8] S.K. Saini, S.K. Pradhan, "Optimization of multi-objective response during CNC turning using Taguchi-fuzzy application", Proc. Eng.97(2014)141-149.
- [9] P. Gupta, Bhagat Singh, "Exploration of tool chatter in CNC turning using a new ensemble approach", materials today: Proceedings volume 43, part 1, 2021, pages 640-645.
- [10] D. Umbrello, R. M'Saoubi, J.C. Outeiro, "The influence of Johnson-Cook material constants on finite element simulation of machining of AISI 316L steel", Int. J.Mach. Tools Manuf. 47(3-4)(2007)462-470.
- [11] Hussani T.M.EL, "Cutting Parameter optimization when machining different materials", Material and Manufacturing 2010 pp 1101-1114.
- [12] M.Sadílek, J.Dubský, Z.Sadílková, Z.Poruba, "Cutting forces during turning with variable depth of cut" Perspectives in Science (2015), <http://dx.doi.org/10.1016/j.pisc.2015.11.055>.

- [13] Cep, R., et al., " Experimental testing of cutting inserts cutting ability", 2013 Teh. Vjesn./Tech. Gaz. 20 (1), 21—26, 1/2013, ISSN 1330-3651.
- [14] Hatala, M., " Simulation of Technological Process", 1st ed. FVT TU, Prešov,2007, ISBN 978-80-8073-756-6, pp. 85.
- [15] Mohanraj Murugesan, Dong Won Jung," Johnson Cook Material and Failure Model Parameters Estimation of AISI-1045 Medium Carbon Steel for Metal Forming Applications", Materials 2019, 12, 609; doi:10.3390/ma12040609.
- [16] M.Hanief, M.F.Wani, M.S.Charoo," Modeling and prediction of cutting forces during the turning of red brass (C23000) using ANN and regression analysis", Eng. Sci. Tech., Int. J. (2016), <http://dx.doi.org/10.1016/j.jestch.2016.10.019>.
- [17] T. Dorlin, F. Guillaume, J.P. Costes, "Analysis and modeling of the contact radius effect on the cutting forces in cylindrical and face turning of Ti6Al4V titanium alloy", Procedia CIRP 31 (2015) 185–190.
- [18] J. Xie, M.J. Luo, K.K. Wu, L.F. Yang, D.H. Li, "Experimental study on cutting temperature and cutting force in dry turning of titanium alloy using micro-grooved tool", Int. J. Mach. Tools Manuf. 73 (2013) 25–36.
- [19] A. Pramanik, L.C. Zhang, J. Arsecularatne, "Prediction of cutting forces in machining of metal matrix composites", Int. J. Mach. Tools Manuf. 46 (14)(2006) 1795–1803.